



**ELECTROSTATIC FILTER
1500**



The acs 1500 is designed for free hanging applications, direct attachment to most machines and machining centres or multiple extraction from smaller machines

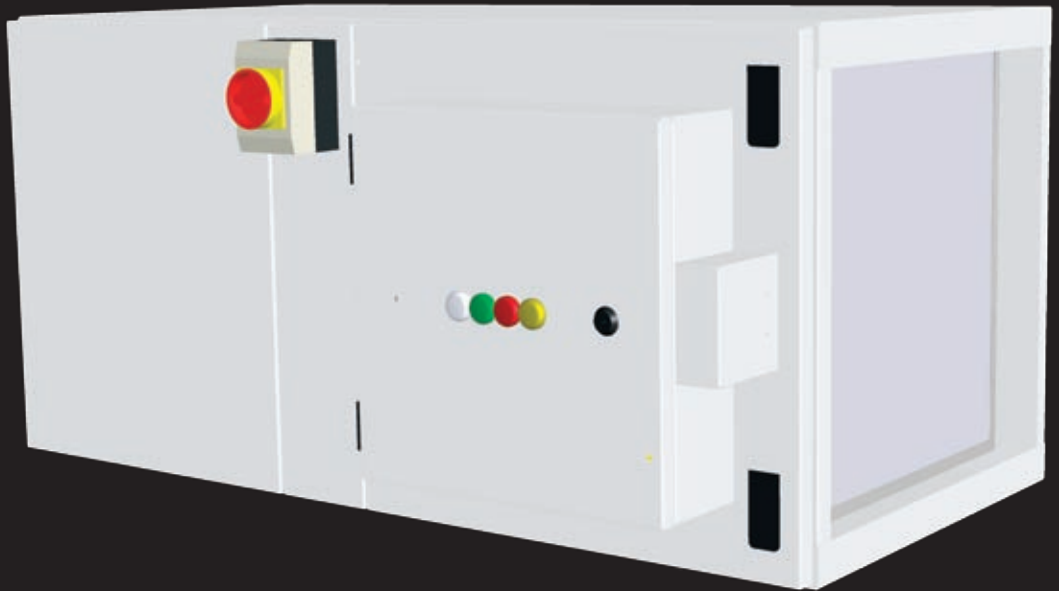


Power supply
 High voltage power supply providing 10000v to the ioniser and 5000v to the collector cell



Fan
 Forward curve centrifugal fan



Motor
 IP54 metric frame motor (0.75-1.5Kw) (400/230v 50/60Hz 3pH)

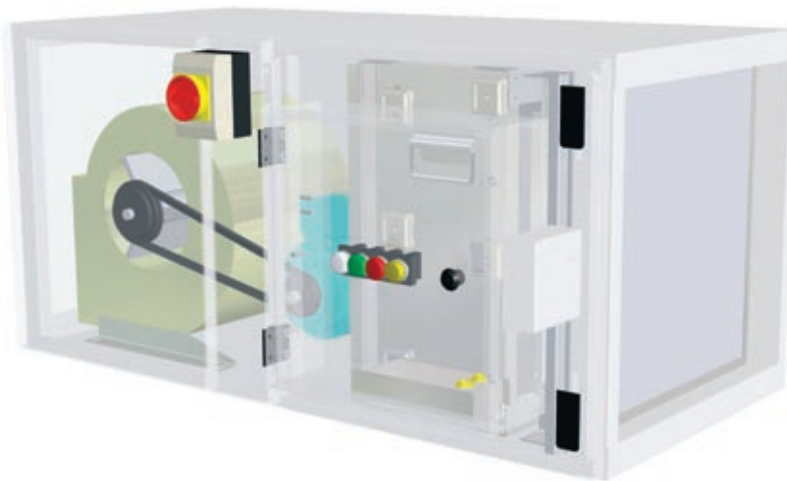


Isolator
 Isolator for start/stop and mains isolation



Collector cell
 High efficiency collector cell constructed from aluminium and steel components with 'dead' spring cut out



Ioniser
 Ioniser constructed from aluminium and steel components with 10 wires or stainless steel 'spikes'



Pre/after filter
 Aluminium mesh pre/after filters

TECHNICAL DATA

Air Volume	1500cfm/2500m ³ /h
Motor rating	0.33 – 1.5Kw
Supply	230/400v 50/60Hz 3pH
	230v 50/60Hz 1pH
Weight	95Kg

FINISH

- RAL 7035
- Wide range of other colours available
- Built to CE Standards

DIMENSIONS

